



The  
Patent  
Office

PCT/GB 00 / 00861

09 MARCH 2000

REC'D INVESTMENT PEOPLE  
16 APR 2000

The Patent Office PCT

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

#5  
Priority Doc  
D'AUGUSTON  
2-13-02

E S U

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*M. C. K.*


Dated

21 March 2000

**THIS PAGE BLANK (USPTO)**

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form))



The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	N.75570 SLS		
2. Patent at (The Patent)	9 MAR 1999		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	ISIS INNOVATION LIMITED 2 South Parks Road Oxford OX1 3UB		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation	UNITED KINGDOM <i>3998564001</i>		
4. Title of the invention	DEGENERATE MODE COMBINER		
5. Name of your agent (if you have one)	J A KEMP & CO		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	14 SOUTH SQUARE GRAY'S INN LONDON WC1R 5LX		
Patents ADP number (if you know it)	<i>26001</i>		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body: See note (d))	YES		

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	12
Claim(s)	3
Abstract	1
Drawing(s)	6

10. If you are also filing any of the following, state how many against each item.

Priority documents


Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application
- Signature  Date 9 March 1999
- J.A. KEMP & CO.

12. Name and daytime telephone number of person to contact in the United Kingdom 0171 405 3292

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue of a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.

-1-

DEGENERATE MODE COMBINER

The present invention relates to a wave device for combining power at microwave/radio frequencies.

5

Solid state devices are low power and, with increasing frequency, the power output from a single solid state device decreases rapidly. In many applications, the power levels that are required exceeded the capability of any single device or amplifier. It is therefore desirable to extend the power level by combining techniques to take advantage of the many desirable features of solid state devices, such as small size and weight, reliability and performance in a broader range of applications. Many types of power combiner are known and these have applications in many areas, such as cellular radio base stations, broadcast services, earth stations, radar and antennas.

20

A significant problem with known power combiners occurs upon failure of one of the input power amplifiers.

25

Figure 1 of the accompanying drawings illustrates a microstrip layout of a 2-way Wilkinson combiner. This combiner performs adequately as long as the power amplifiers on both of its inputs are functioning correctly. However, this combiner requires the impedance at both inputs to be balanced. If the power amplifier at one input fails, then power from the other input is out of balance and performance drops significantly. Indeed, it can become very difficult, if not dangerous, to attempt to replace the failed power amplifier, since disconnection of the failed power amplifier from its input may result in transmission of waves from that input to the service engineer.

35

For previously known methods of power combinations, the following efficiencies are available for a 2- amplifier arrangement under fully working conditions and with a single amplifier failure:

5

Wilkinson:

No failure: 90%,

Single amplifier failure 40%;

Directional Coupler:

10

No failure: 90%,

Single amplifier failure 39%;

N-way hybrid combiner:

Single amplifier failure: 25%;

Planar:

15

Single amplifier failure: 25%.

Description of the N-way hybrid combiner and the planar device may be found respectively in A.A.M. Saleh, "Improving the Graceful-Degradation Performance of Combined Power Amplifiers" *IEEE Trans. Microwave Theory Tech*, Vol. MTT-28, No. 10, Oct 1980, pp 1068-1070 and I.J. Bahl and . Bhartia, *Microwave Solid State Circuit Design*, Wiley, New York, 1988.

25

Hence, it is an object of the present invention to provide a combiner of improved sufficiency, particular upon failure of an input amplifier.

30

According to the present invention there is provided a method of combining electromagnetic waves comprising:

arranging a first pair of inputs across a wave device so as to set up a first standing wave therebetween;

35

arranging a second pair of inputs across the wave device so as to set up a second standing wave

therebetween such that the input independence of each of the first and second pairs of inputs is unaffected by the other of the first and second pairs of inputs; and

5 arranging an output at a position on the wave device so as to receive power from both the first and second standing waves.

According to the present invention there is provided a wave device for supporting electromagnetic waves, the  
10 device including:

a first pair of inputs for setting up a first standing wave therebetween;

15 a second pair of inputs for setting up a second standing wave therebetween and positioned such that the input signal of each of the first and second pairs of inputs is unaffected by the state or impedance of the other of the first and second pairs of inputs; and

20 an output positioned so as to receive power from both the first and second standing waves.

In this way, since the inputs to the wave device are arranged in pairs, any failure results in a symmetric loss of input to the wave device, furthermore, since  
25 pairs of inputs are positioned on the device such that they have no effect on the other inputs, any failure will not affect the balance of the other inputs. Failure of one pair of inputs merely results in a corresponding loss of power at the output.

30

An additional advantage is that, since each pair of inputs receives no power from the other pair of inputs, upon failure of an input amplifier, that input amplifier can be disconnected and replaced without any danger of  
35 transmission from the disconnected input.

The wave device may include a conductive plate for supporting the first and second standing waves. The plate may be mounted parallel to a grounded structure and separated from the grounded structure by a dielectric.

5 In this way, the device may be constructed as a microstrip structure. Such structures are well known and may be easily produced by the skilled person.

10 The plate may be a polygon having an even number of sides with each respective pair of inputs connected across an opposing pair of sides. Alternatively, the plate may be circular, such that each respective pair of inputs is connected to the plate across a diameter of the plate.

15

In this way, the invention may be carried out with the pairs of inputs angularly displaced around the perimeter of the plate.

20 Preferably, the output is positioned at substantially the antinode of the device which may be preferably the centre of the device.

25 In this way, the output may easily receive power from both of the standing waves.

30 Preferably the device further comprises first and second dividers for providing the first and second pairs of inputs from first and second signal sources. In this way, power from a single signal source is evenly divided between a pair of inputs, such that power is input across the device evenly.

35 The device may comprise one or more additional pairs of inputs for setting up additional respective standing



waves.

In this way, the combiner may combine three or more signals, with each signal being independent of the other signals and not effecting the input impedance.

The wave device may also be used as a splitter by providing a power input at the output of the wave device and receiving divided power output from the pairs of inputs.

The invention will be more clearly understood from the following description, given by way of example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates a known 2-way Wilkinson combiner;

Figure 2 illustrates an embodiment of the present invention;

Figure 3 illustrates a cross-section through the embodiment of Figure 2;

Figure 4 illustrates the microstrip layer of a divider;

Figure 5 illustrates a microstrip layer of a matching circuit;

Figure 6 illustrates a schematic construction of an embodiment of the present invention;

Figure 7 illustrates the frequency response of an embodiment of the present invention with both amplifiers working and with a failed amplifier; and

Figure 8 illustrates a frequency response of an embodiment of the present invention with both amplifiers working and with a failed amplifier.

An embodiment of a 2-way combiner will now be

described. The wave device will be referred to as a degenerate mode combiner, or DMC, since it makes use of resonant modes of the device and provides graceful degradation performance upon input amplifier failure.

5

The basic input structure of the DMC is illustrated in Figure 2 and the corresponding output structure is illustrated by the cross-section of Figure 3.

10

Output from two power amplifiers are provided respectively to the input ports 2 and 4 of two 2-way dividers 6 and 8. The 2-way dividers 6 and 8 may be of any known design, for instance a 2-way Wilkinson divider. The microstrip layout of such a 2-way Wilkinson divider is illustrated in Figure 4.

15

The two outputs of the first divider 6 are provided as a pair of inputs 10,12 to the DMC and the two outputs of the second divider 8 are provided as a pair of second inputs 14,16 to the DMC. As illustrated, the wave signals are transmitted from the dividers to the DMC via coaxial cable 18, though, of course, any other suitable wave guide could also be used.

20

25

In the 2-way combiner of this embodiment, the two pairs of inputs 10,12 and 14,16 are offset around the DMC by 90°. As will be described later, this results in the first pair of inputs 10,12 setting up a first standing wave across the DMC in one direction and the second pair of inputs 14,16 setting up a second standing wave across the DMC in a perpendicular direction. By choosing appropriate frequencies, dimensions and properties of the DMC, it is also arranged that the standing wave produced by one of the pair of inputs has no effect on the other pair of inputs. In this way, failure or disconnection of

30

35

one of the power amplifiers supplying its power input will have no effect on the other input.

Referring to Figure 3, it will be seen that an  
5 output 20 from the DMC is taken from the centre. In this embodiment, the DMC is arranged such that the waves from both of the pairs of inputs create an anti-node at the centre of the DMC. Thus, the output 20 is formed from a combination of the signals input from both pairs of  
10 inputs 10,12 and 14,16, even though one pair of inputs does not provide any power to the other pair of inputs.

The output signal from the DMC may be transferred using a coaxial cable 22 or any other suitable wave  
15 guide. Furthermore, a matching circuit 24 may be used to provide an output port 26 for further signal transmission.

Any suitable known matching circuit may be used.  
20 However, a typical microstrip layout for the matching circuit is illustrated in Figure 5.

As illustrated in Figure 3, the DMC is preferably constructed as a microstrip structure. In particular, it  
25 includes a conductor plate 28 supported on a dielectric 30, in an earthed support structure 32. Any suitable material may be used for the conductor 28, though it is preferred to use copper or a super conductor. It is considered to use copper having a thickness of  
30 approximately  $17\mu\text{m}$ . However, since any field is to be carried in a skin depth of only a few  $\mu\text{m}$ , it is sufficient to use a thickness of approximately twice the skin depth.

35 Any suitable material may be used for the dielectric

30. Indeed, if the plate 28 is appropriately supported, for instance by means of its connecting pins, then the dielectric 30 may be a gas, such as air, or indeed free space.

5

It is also contemplated to base the device on Gallium Arsenide or such like and thereby allow production using integrated circuit techniques.

10

As illustrated, the output 20 is taken through the dielectric and also through and insulated from the support structure 32. Although not illustrated, a similar arrangement is provided for the inputs. These connect to the periphery of the plate 20, whilst being insulated from the support structure 32. Any ground line of the wave guides for the inputs, for instance the shielding of a coaxial cable, may be connected to the support structure 32.

15

20

The embodiment discussed above used a DMC of circular structure having two pairs of inputs and a centrally mounted output. However, as will be apparent from the following, such a structure is not necessary for application of the present invention. For instance, when using two pairs of inputs with perpendicular standing waves, the DMC, or at least the plate 28 in the microstrip embodiment, can be square with inputs mounted centrally along respective edges of the square.

25

30

Referring to Figure 6, a broader description of the principles behind the present invention will be described.

35

By applying a signal to both inputs 34,36 across a device 38, it is possible to set up a standing wave

across the device 38. The nature of that standing wave will vary according to the frequency of the input signal, the distance between the two inputs and the properties of the wave device 38. In particular, the resonant frequency between the inputs will depend on the distance between them and, for the embodiment of Figure 3, the dielectric constant of the dielectric 30. For the same resonant frequency, the size of the device will be reduced as the dielectric constant increases.

When a standing wave exists between the inputs 34,46, the signal which can be detected at the periphery of the device 38 varies around the periphery. When the standing wave between the inputs 34,36 is at the fundamental frequency, then the detected signal at the periphery of the device 38 reaches a minimum of substantially zero at a position halfway between the inputs 34 and 36. Thus, for a 2-way combiner, it is sufficient to connect a second pair of inputs perpendicular to the first pair of inputs. It will be noted that, in this case, with two perpendicular standing waves, it is therefore sufficient for the device 38 to be square.

By changing the operating frequency of the device or alternatively changing the size or the properties of the device, it is possible to set up different standing waves. In particular, it is possible to set up standing waves such that the detected signal at the periphery reaches substantially zero at multiple points around the periphery. In this way, it is possible to arrange three or more pairs of inputs around the periphery to provide a three or more-way combiner. Indeed, the device may then be any even sided polygon such as a hexagon, octagon etc. It should be appreciated that the device can be arranged

to have multiple zero points around its periphery and yet still be used as only a 2-way combiner. However, when the device is used with more zero points around its periphery, the angular sensitivity of the positions of the inputs is increased, such that manufacturing tolerances must also be increased.

It will be appreciated that it is also possible to set up appropriate standing waves in the device without providing the inputs at the periphery. In particular, it is possible to connect pairs of inputs to the device at various positions within the periphery, for instance connected to the device in a similar way to the output. The positioning of those inputs is determined according to the standing waves set up in the device.

In order to further improve separation between respective pairs of inputs, it is also possible to provide gaps or slots in the device positioned at points of zero signal.

As another alternative, it is possible to provide an asymmetric device, such that standing waves of different frequencies are set up in different directions and, hence, enabling signals of different frequencies to be combined at the output.

#### Examples

Two DMCs were designed with approximately similar specifications. They both had centre frequencies of 1.8 GHz and operational band widths of 15 MHz. The DMCs utilised 2-way and 4-way Wilkinson dividers respectively so as to analyse the effects of varying N, the number of outputs from the Wilkinson divider. DMCs were initially

simulated with both amplifiers working and then with one of the amplifiers failing. A failed amplifier was defined according to the worst case, namely (i) zero output power and (ii) the impedance of the failed amplifier, as seen from the divider, ranging from zero to infinity i.e. anything between short circuit to ground and an open circuit. The results of the test are illustrated in Figures 7 and 8. The output power from a working amplifier is one unit and the results obtained include the losses incurred by the Wilkinson divider, which has an efficiency of 90%.

Referring to Figure 7, using a 2-way Wilkinson divider for the first stage and a centre frequency of 1.8 GHz, it will be seen that, for both amplifiers working, the total combining efficiency at the centre frequency was 80%, with the worst efficiency within the operational band width being 78%. Similarly, for a single amplifier failure, the total combining efficiency at the centre frequency was 63% and the worst efficiency within the operational band width was 59%.

For the second case, illustrated in Figure 8 utilising a 4-way Wilkinson divider and a centre frequency of 1.83 GHz, it will be seen that for both amplifiers the total combining efficiency at the centre frequency was 80% and the worst efficiency within the operational band width was 80%. Similarly, for a single amplifier failure, the total combining efficiency at the centre frequency was 63% and the worst efficiency within the operation band width was 54%.

In conclusion, it will be seen that the simulation results obtained show that the DMC has an efficiency significantly higher than the previously mentioned

combiners when one of the amplifiers fails. Although a combining disk of the DMC has an efficiency of 90%, like most combiners, it also requires a splitting stage, which reduces the total combined efficiency to 80%.

5

Finally, it will be noted that like other previous combiners, it will be possible to operate the DMC in the reverse direction as a splitter. For example, for the embodiments of Figures 2 and 3, by providing an input  
10 signal at the centre 20 of the plate 28, the output power from a signal may be evenly split between the pairs of connections 10,12 and 14,16 at the periphery.



Claims

1. A wave device for supporting electromagnetic waves,  
the device including:

5

a first pair of inputs for setting up a first  
standing wave therebetween;

10

a second pair of inputs for setting up a second  
standing wave therebetween and positioned such that the  
input signal of each of the first and second pairs of  
inputs is unaffected by the state or impedance of the  
other of the first and second pairs of inputs; and

an output positioned so as to receive power from  
both the first and second standing waves.

15

2. A wave device according to claim 1 including a  
conductive plate for supporting the first and second  
standing waves.

20

3. A wave device according to claim 2 wherein the plate  
is mounted parallel to a grounded structure and is  
separated from the grounded structure by a dielectric.

25

4. A wave device according to claim 3 wherein the  
device is constructed as a microstrip structure or a  
stripline structure.

30

5. A wave device according to claim 2, 3 or 4, wherein  
the plate is a polygon having an even number of sides and  
each respective pair of inputs is connected across an  
opposing pair of sides.

35

6. A wave device according to claim 2, 3 or 4, wherein  
the plate is circular and each respective pair of inputs  
is connected to the plate across a diameter of the plate.

7. A wave device according to any preceding claim wherein the output is positioned at substantially the antinode of the device.

5 8. A wave device according to any preceding claim wherein the distance between a pair of inputs equals an integer number of the wave length of the wave transmitted by the inputs.

10 9. A wave device according to any preceding claim further comprising power dividers for providing the pairs of inputs from the signal sources.

10. A wave device according to any preceding claim  
15 further comprising one or more additional pairs of inputs for setting up additional respective standing waves.

11. A method of operating the wave device of any preceding claim as a splitter, the method providing a  
20 power input at the output of the wave device and receiving divided power output from the first and second pairs of inputs.

12. A method of combining electromagnetic waves  
25 comprising:

arranging a first pair of inputs across a wave device so as to set up a first standing wave therebetween;

arranging a second pair of inputs across the wave  
30 device so as to set up a second standing wave therebetween such that the input independence of each of the first and second pairs of inputs is unaffected by the other of the first and second pairs of inputs; and

arranging an output at a position on the wave device  
35 so as to receive power from both the first and second

standing waves.

13. A wave device constructed and arranged substantially  
as hereinbefore described with reference to and as  
5 illustrated in Figures 2 to 8 of the accompanying  
drawings.

14. A method of operating a wave device as a splitter  
substantially as hereinbefore described with reference to  
10 and as illustrated in Figures 2 to 8 of the accompanying  
drawings.

15. A method of combining electromagnetic waves  
substantially as hereinbefore described with reference to  
15 and as illustrated in Figures 2 to 8 of the accompanying  
drawings.

ABSTRACT

DEGENERATE MODE COMBINER


5        A wave device for supporting electromagnetic waves,  
the device including a first pair of inputs for setting  
up a first standing wave therebetween a second pair of  
inputs for setting up a second standing wave therebetween  
and positioned such that the input signal of each of the  
10      first and second pairs of inputs is unaffected by the  
other of the first and second pairs of inputs and an  
output positioned so as to receive power from both the  
first and second standing waves.

15


20

Fig. 2

Fig 1

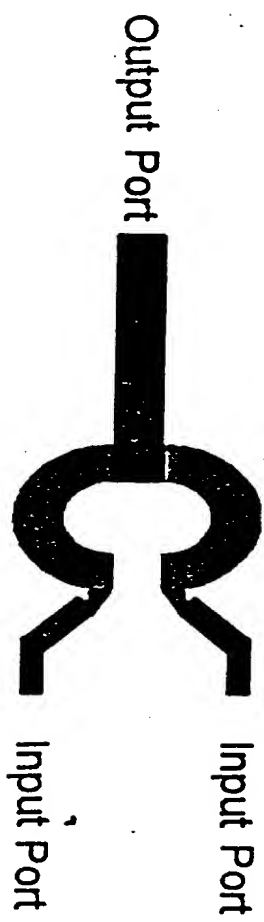

**THIS PAGE BLANK (USPTO)**

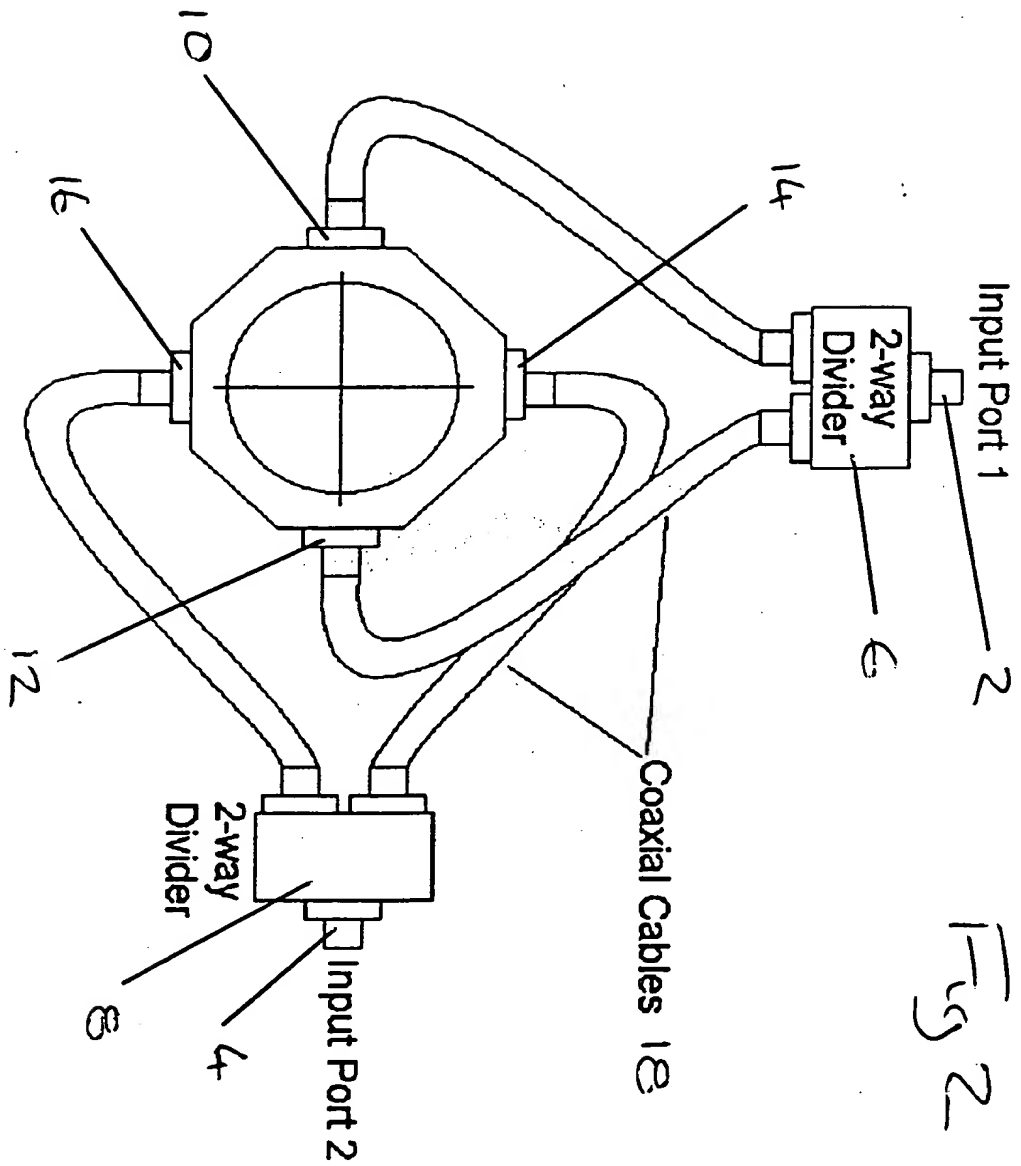

**THIS PAGE BLANK (USPTO)**



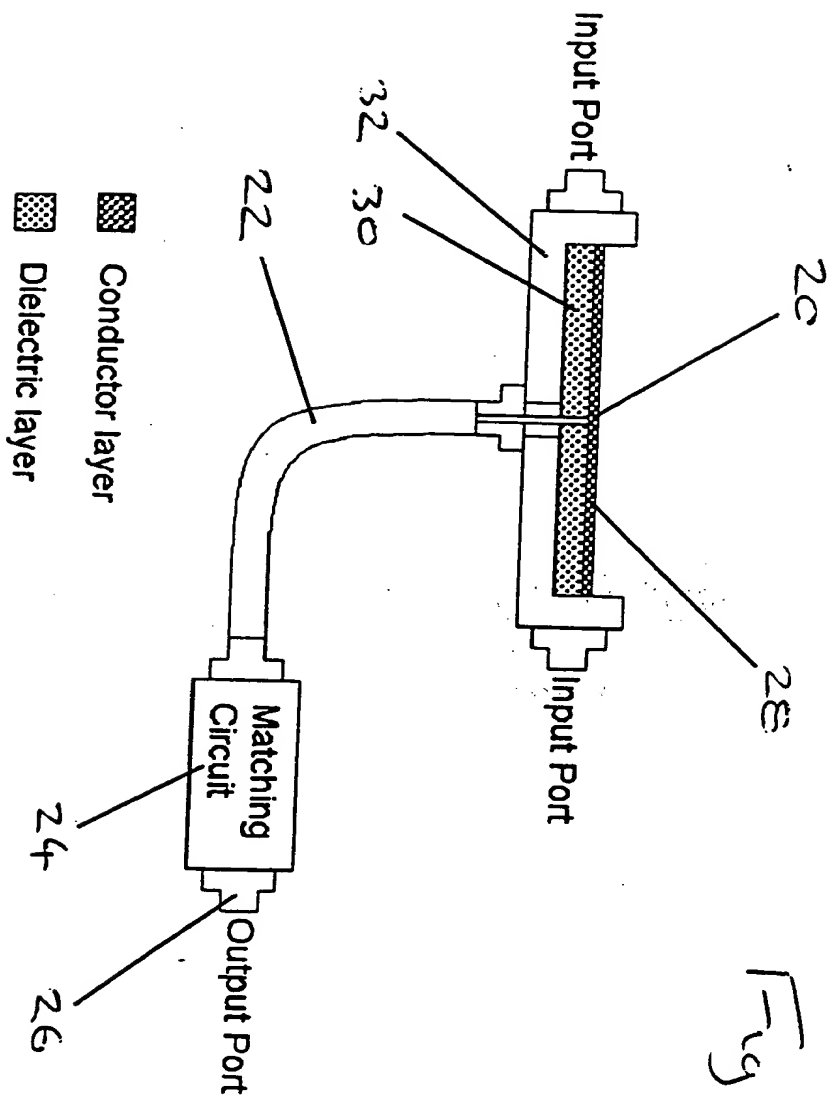



Fig 3

**THIS PAGE BLANK (USPTO)**

Fig 5



Fig 4

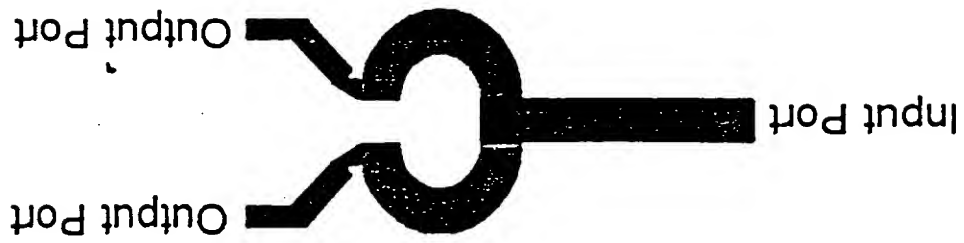

**THIS PAGE BLANK (USPTO)**

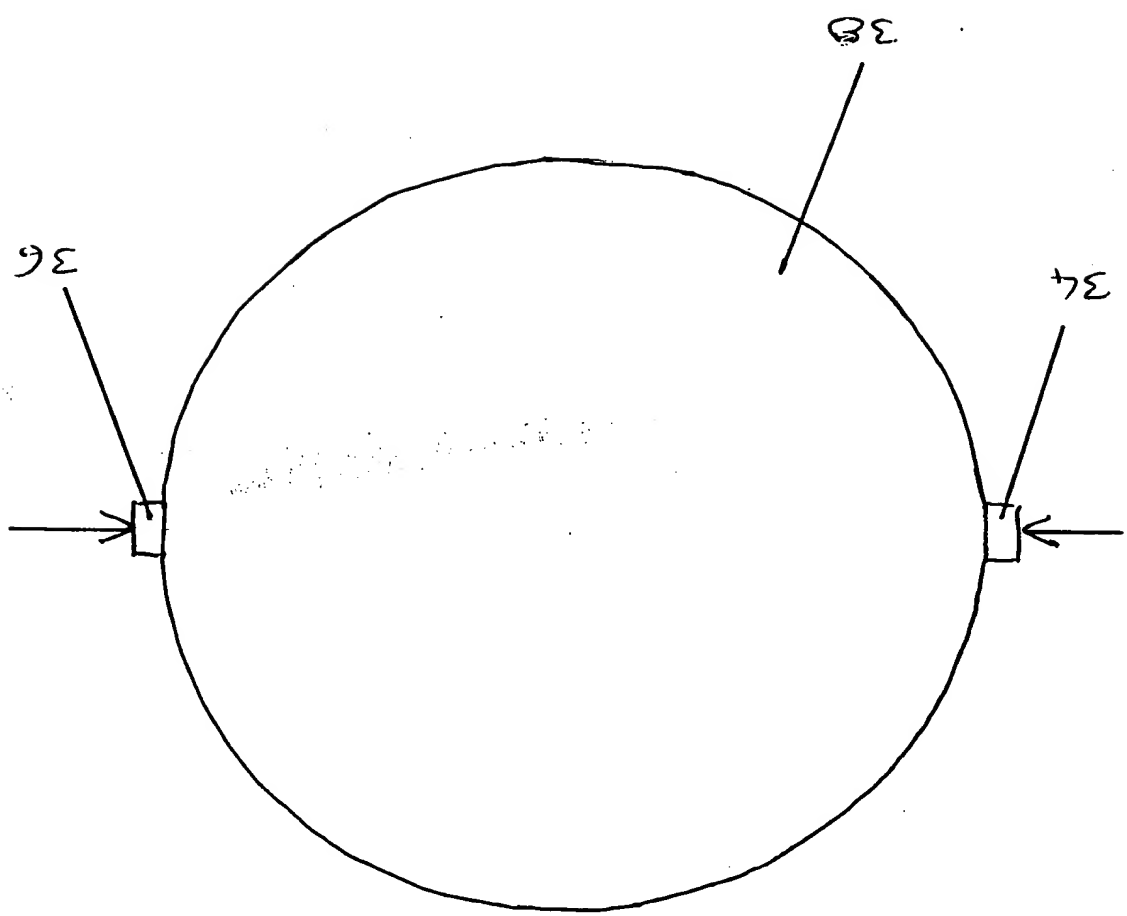


Fig 6

**THIS PAGE BLANK (USPTO)**

Fig 8


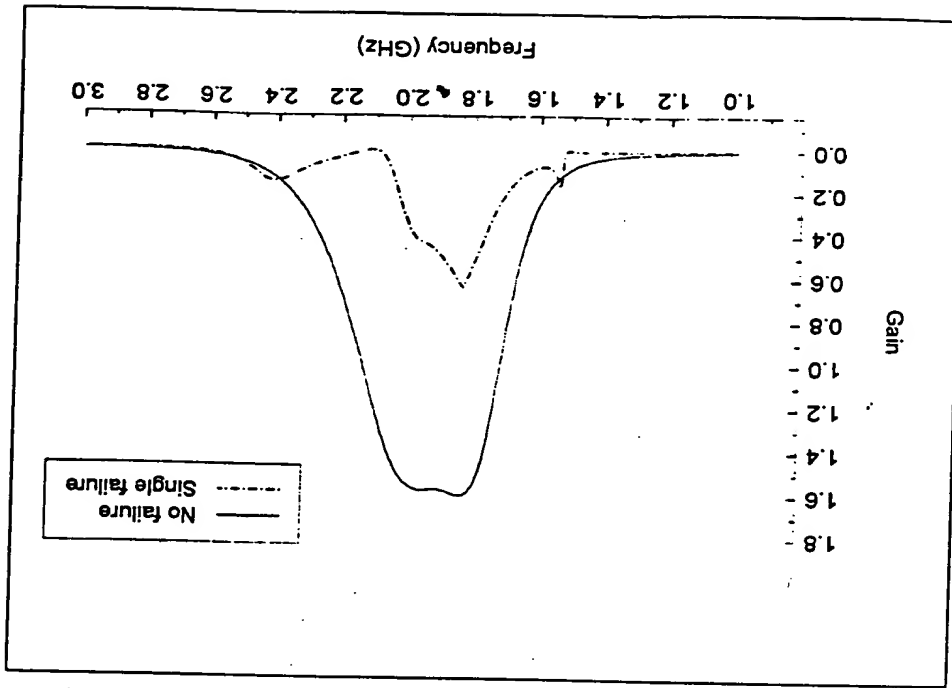


Fig 7

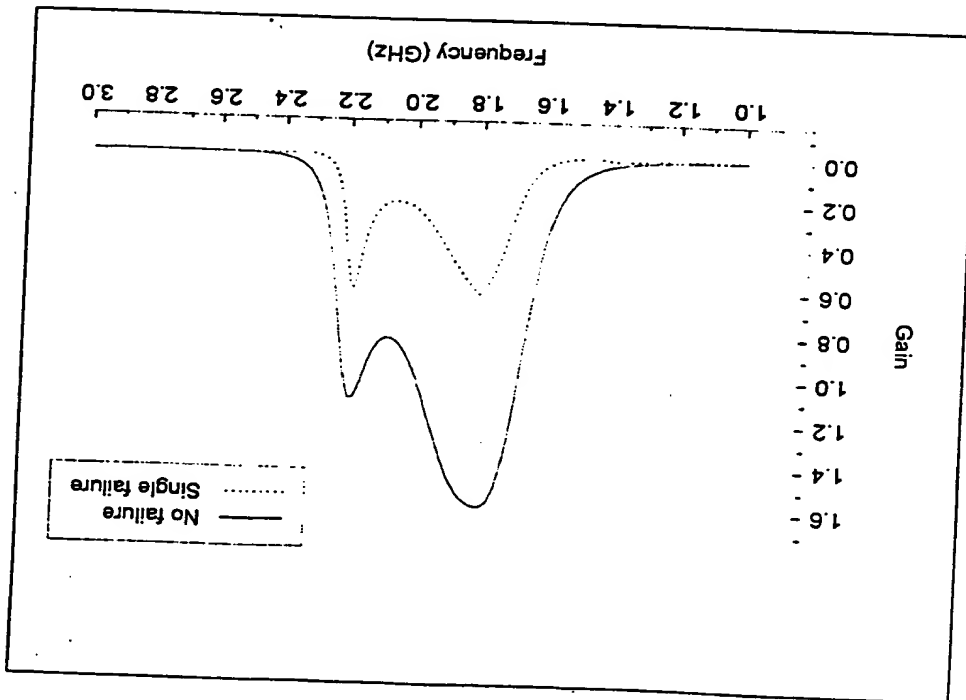

PCT / GB00 / 0086

9-3-00

JA Kemp & Co

**THIS PAGE BLANK (USPTO)**